



North Eastern Door Frames



Product Data Sheet
FIRE DOORS

An access door with fire resistant vermiculite core, finished with timber sheets and internal edge strips.





The NEDF Fire Door is a multi-purpose door ideal for internal and external use in industrial, commercial and residential applications where fire protection is required.

It uses timber rails to form a frame around a fire resistant vermiculite core. It is manufactured in accordance with AS1530 part 4, and is certified to AS1905 part 1 of the building code standards.

Varying finishes provide a professional look while maintaining functionality, durability and security. A large range of hardware options are available and can be fitted upon request. Framing selections depend on single or double width and swing choice.

Application

Warehouses, basement offices, schools, maintenance facilities, hospitals, residential units, shopping centres.

Finishes

The standard finish is ply sheet. Other finishes available include MDF, duracote and veneer. Metal sheets with thicknesses up to 1.5mm can be used to increase durability and security.

M	4mm MDF	P	3.6mm Plywood*	H	3.2mm HMRXP
PM	4mm MDF	VO	4mm Veneer Oak/Ash	VM	3.2mm Veneer SPM
PF	Fire Treated Plywood				

Specification

Based on standard door configuration. Other sizes, finishes, frames, and hardware options are available.


Size	Standard <ul style="list-style-type: none"> • 2040mm high x 820mm wide x 36mm thick (internal 1-hour) • 2040mm high x 920mm wide x 45mm thick (external 2-hour) Double <ul style="list-style-type: none"> • 2040mm high x 920/920mm wide x 45mm thick (external 2-hour)
Design	Incorporates 10mm wide internal edge strips to form a frame around the core in compliance with AS1530 part 4 and AS1905 part 1
Finish	Ply Sheet
Core	Vermiculite sheet
Weight	45mm leaf - 40KG 36mm leaf - 32KG

To Specify

Door shall be NEDF Fire Door to AS1530 part 4 standard and certified to AS1905 part 1. 45mm or 36mm thick standard door leaf of vermiculite covered with ply sheet. Timber internal edge strip to surround core material. Other hardware and seals can be fitted by NEDF as required.

To order

Refer to the Fire Door order sheet for a full list of options and ordering information.

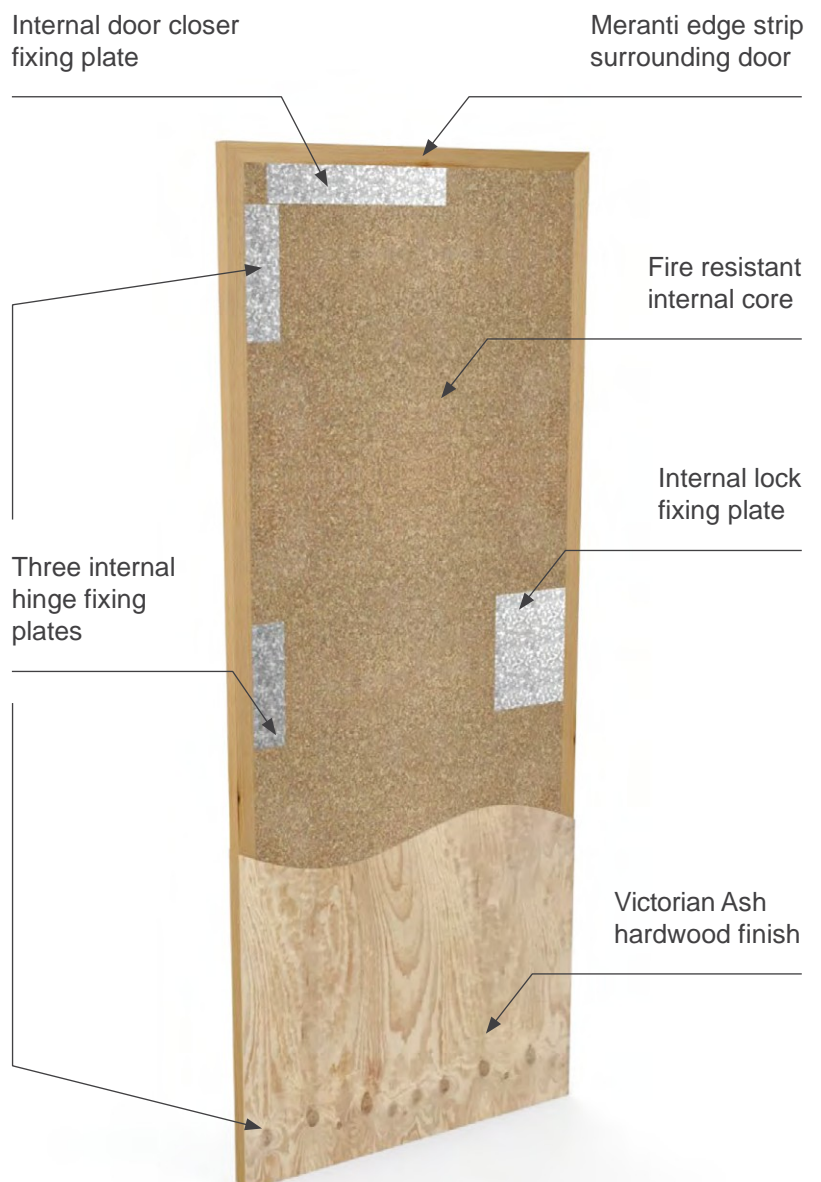



**NEDF MANUFACTURES SPECIALISED DOORS
AND FRAMES FOR COMMERCIAL AND
INDUSTRIAL APPLICATIONS.**

All statements, technical information, and recommendations related to NEDF's products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application.



NEDF Pty Ltd

5 / 14 Geebung Drive PORT MACQUARIE NSW 2444

PHONE: 1300 784 852

PHONE: 02 6581 2822

EMAIL: sales@nedf.com.au

WEB: nedf.com.au